



SINCE 1964

主典興業股份有限公司

TRUE TEN INDUSTRIAL CO., LTD.

主典生化科技食品乾燥設備有限公司

TRUE TEN BIO-TECH & FOOD DRYER/COOLING EQUIPMENT CO., LTD.

ISO 9001
品質保證



本公司有修改目錄內機臺結構及規格權利

YK-111系列

大空間食品低溫冷風乾燥機

Large space low temperature cool wind dryer

解決日曬法之氣候不穩定而導致乾燥品質的差異落差極大，且遭受空氣中所含有害毒氣塵埃、蚊蟲等之污染，造成衛生上的一大禁忌，并可解決高溫乾燥法之以熱風或電熱乾燥直接乾燥後，對物品外觀造成損壞、脆化、老化及破壞分子結構或細胞組織使養份流失失去原有風味等缺點。

高品質之低溫冷風乾燥機，經由特殊專利設計之循環冷卻、加熱，將使空氣中之水份越來越少，而達到最天然之乾燥效果，經測試後，其不破壞組織、養份與原風味的顯著效果深獲讚賞。

● 適用範圍：

魚肉類、蔬菜、茶葉、花材、菇類、化學品、食品業界、生化業界、醫學業界、環工業界、化工業界、電子…等。

● 功能特點：

- 1、可保持被乾燥物之原有風味與營養成份不流失並可保有較佳之原有外觀色澤，可提高產品的價值；
- 2、乾燥物在常溫下能長久儲存，無需花高費的冷藏，更不需添加任何防腐劑。

It solve the problem of quality divergence resulted from climate unsteady, polluted by harmful gas,dust,insect.That always be taken to a banning on sanitary.It also solve the problems such as:appearance damage, molecular or structure destroy caused by electric high radiation, high wind,brittle,ageing, nutrition loss,flavor loss, etc. Patent circulating cooling & heating system, enable the contain water of the air be fewer,then it would reach the excellent natural drying effect.

● Application:

The equipment which are being used in the field of fishery, meat, vegetable,tea,flower material, mushroom,food,biotechnology, medical,environmental recycling dispose, chemical,electronic, etc.

● Characteristic:

- 1、It could keet original flavor and the nutrition wouldn't be loss,lift the value the product.It's the practical low temperature drying machine.



臺灣專利: PATANTED 130580 130582 062994 TAIWAN

美國專利: PATANTED 5.940.983 U.S.A.

大陸專利: PATANTED ZL98209051.X CHINA

本機榮獲:

- ★ 2003韓國國際發明金牌獎
- ★ 中小企業創新研究獎

- 3、溫度可依產品的需求而設定；
 - 4、操作簡單，保養容易，乾燥效率特強；
 - 5、臺車及置物盤可依客戶需求訂制適用規格。
- 2、The process products could be stored for long time, no need spent high cold storage fee,no need any antiseptic.
 - 3、The process temperature could be set by different material.
 - 4、Easy to operate, maintain, good dehydration effect.
 - 5、The quantity & dimension of cart and tray could be designed by the need of customer.

● 產品規格: Specifications

| 機型 TYPE | YK-111-3 | YK-111-6 |
|--|---|-------------------------|
| 箱體尺寸 Dimension(cm) | 350x135x258 | 350x270x258 |
| 壓縮機能力 Compressor power | 氣冷 Air-cooled / 5HP | 氣冷 Air-cooled / 5HP+5HP |
| 台車數量/尺寸(cm) cart/size | 3台cart / 107x62x150 | 6台cart / 107x62x150 |
| 乾燥盤數量/尺寸(cm) tray/size | 45盤 tray / 100x62x3 | 90盤 tray / 100x62x3 |
| 中繼循環風扇 Continuing circulation fan in the center | 1 | 2 |
| 加熱器(kw) Heater | 10.8kw | 21.6kw |
| 操作溫度(°C) Operating temperature | 常溫 Normal temperature~45°C 低溫控制需視環境溫度而定 Low temperature control depends on the temperature of the environment | |
| 總耗電量(kw) Electricity Consumption | 18kw | 36kw |

YK-112RS/YK-112R系列

多用途低温冷風乾燥機

Multi-Function Low Temperature Cool Wind Dryer



本機榮獲：

- ★ 2003韓國國際發明金牌獎
- ★ 中小企業創新研究獎
- ★ 外貿協會設計優良產品獎


臺灣專利 TAIWAN

PATANTED 184212 M240086

專利申請序號 PATENT PENDING
92202314

大陸專利 CHINA

PATANTED ZL98250025.4 ZL03239896.4

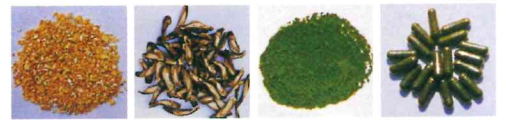

與YK-111相同功能之YK-112低温冷風乾燥機，其優異功能表現，搭配獨特的設計系統與適用性，除了獲得中小企業協會“創新研究獎”外，更獲得外貿協會頒發之“設計優良產品獎”，為客戶對其高品質乾燥產品提供了一個最佳的選擇。

● 功能特點：

- 1、實用之低温冷風乾燥可保持被乾燥物之原有風味與營養。

The same function with YK-111 low temperature drying machine. It's excellent function performance and unique designed matches well. This machine was not only awarded “Innovational Research Prize” issued by small & medium business association but also awarded the medal of “Good Design Product” issued by the China External Trade Development Council. It provides a best choice for high quality product drying.

● Characteristic:

- 1、It could keep original flavor and the nutrition wouldn't be loss, lift the value the product. It's the practical low temperature drying machine.
- 2、The process proucts could be stored for long time, no need spent high cold storage fee, no need any antiseptic.

成份不流失并可保有較佳之原有外觀色澤，可提高產品的價值。

- 2、乾燥物在常温下能長久儲存，無需花高費的冷藏，更不需添加任何防腐劑。
- 3、溫度可依產品的需求而設定。
- 4、操作簡單，保養容易，乾燥效果特佳。
- 5、附輪子適用任何地方，機動性强。

- 3、The process temperature could be set by different material.
- 4、Easy to operate, maintain, good dehydration efficiency.
- 5、The machine installed wheel is available any location.

● 產品規格：Specifications

| 機型 TYPE | YK-112RS | YK-112R |
|-------------------------------------|---|---------------------|
| 機台尺寸 Dimension(cm) | 100x80x148 | 120x97x188 |
| 壓縮機能力 Compressor power | 氣冷 Air-cooled / 1HP | 氣冷 Air-cooled / 2HP |
| 置物盤層數 tray | 10 | 18 |
| 置物盤/尺寸(cm) tray/size | 62x50x2.5 | 75x60x2.5 |
| 加熱器(kw) Heater | 2.1kw | 3.3kw |
| 操作溫度(°C) Operating temperature | 常溫 Normal temperature~45°C 低温控制需視環境溫度而定 Low temperature control depends on the temperature of the environment | |
| 總耗電量(kw) Electricity Consumption | 4kw | 6kw |

YK-111H 系列

熱風乾燥機

Hot Wind Drying Machine



● YK-111H 熱風乾燥機

- ★ 解決日曬法之氣候不穩定而導致乾燥物品質的差異性大。
- ★ 可避免容易中有害毒氣、塵埃等的污染。
- ★ 可避免蚊、蠅、蟲等害蟲的污染。
- ★ 溫度可依產品特性不同而適度調設。
- ★ 操作簡單、保養容易、乾燥效率高。
- ★ 機臺規格、臺車數量及置物盤可依客戶需求訂制適用規格。

● 用途：

各類食品、水果、蔬菜、中藥材、菇類、菌類、魚肉類、電子、化工品等之高溫乾燥。

● 產品規格：Specifications

| 機型 TYPE | YK-111H-3 | YK-111H-6 |
|-------------------------------------|------------------|------------------|
| 機臺尺寸 Dimension(cm) | 322x140x210 | 322x260x210 |
| 台車/盤數 Cart/tray | 3台cart / 45 tray | 6台cart / 90 tray |
| 置物盤尺寸 tray/size(cm) | 100x62x3 | 100x62x3 |
| 循環風扇 Circulation fan | 1HP / 1set | 1HP / 2set |
| 加熱器(kw) Heater | 16.2kw | 32.4kw |
| 總耗電量(kw) Electricity Consumption | 18kw | 36kw |

● YK-111H Hot Wind Drying Machine

- ★ Could solve the problem of the big drying quality differentiation caused by the sun drying unsteady climate.
- ★ Could avoid dust and toxic waste ash pollution.
- ★ Could avoid the pollution of mosquito, fly, insect pest, etc.
- ★ The processing temperature could be appropriately set according to different material characteristic.
- ★ Easy operating and maintaining, high efficiency.
- ★ The specification, cart amount and tray size could be custom-made to meet customer's need.

● APPLICATION:

Be applicable to every kind of food, fruit, vegetable, Chinese herbal medicine, mushroom, fungus, meat, fishing, electronic chemical article, etc.

YK-116系列

真空乾燥機
Vacuum Dryer



● YK-116 真空乾燥機

以真空乾燥，速度最快，更不破壞原有養份及成份，增加產品的最高附加價值（不適用液體之乾燥）。且可保有最佳之原有風味與色澤，

● 用途：

農產品、水果、蔬菜、魚類、中藥材、化工、生化科技、製藥、酵素等之快速乾燥。

● YK-116 Vacuum Dryer

Dry process by vacuum drying machine, the speed would be the most fast. Won't destroy original nutrition. Keep good original flavor and color. Lift it to the highest add value of products. (This machine is not suit for liquid material drying.)

● Applications:

Dry for agriculture, fruits, vegetables, fishes, herbs, chemical, bio-chemical, medicine and enzyme, etc.

● 產品規格: Specifications

| 機型 TYPE | YK-116-50 | YK-116-100 |
|---|---------------------------------|--|
| 機臺尺寸 Dimension(cm) | 180x110x180 | Ø110x240x180 |
| 冷凝溫度 (°C) condensation temperature | -10°C ~ -20°C | -10°C ~ -20°C |
| 置物盤數 The quantity of tray | 7 | 20 |
| 置物盤尺寸 tray/size(cm) | 64x64x3 | 64x52x3 |
| 壓縮機能力 Compressor power | 全密式 Fully enclosed 4HP | 半密式 Semi enclosed 7.5HP |
| 真空泵型式/抽氣速度(L/min) Vacuum pump type / pumping speed | 單段油式 Single stage oil/1600L/min | 單段油式+助力泵 10000L/min Single-stage oil + booster pump |
| 加熱器(kw) Heater | 4.2kw | 10.8kw |
| 總耗電量(kw) Electricity Consumption | 11kw | 26kw |

YK-118系列 (大量產型)

真空冷凍乾燥機

Vacuum Freeze Dryer large yeild



● YK-118 微電腦真空冷凍乾燥機

某些乾燥產品，除了要求保持原有養份與成份外，當特別要求外觀色澤與形狀的不變，及活性菌體之再生率或高價值之濃縮萃取液需要乾燥時，以微電腦真空冷凍乾燥機的昇華乾燥方式，其微電腦程式控制及附設之電腦記錄追蹤乃是乾燥產品，最具科學化與現代化的選擇，而本公司可依客戶需求設計不同產量的機型。

● 用途：

生物、醫藥、食品之真空冷凍乾燥。

● 產品規格：Specifications

| 機型 TYPE | YK-118-100 | YK-118-150 | YK-118-250 |
|---|--------------------|--------------------|--------------------|
| 乾燥箱體尺寸(cm) Drying box dimension (cm) | Ø110x240x180 | Ø110x265x180 | Ø136x285x180 |
| 主機箱體尺寸 Dimension(cm) | 180x120x190 | 180x120x190 | 180x120x200 |
| 冷凝溫度 (°C) Condensation temperature | -50°C ~ -60°C | -50°C ~ -60°C | -50°C ~ -60°C |
| 置物盤數量/尺寸 tray quantity / size | 20盤 tray / 64x52x3 | 20盤 tray / 64x60x3 | 44盤 tray / 60x47x3 |
| 壓縮機能力 Compressor power | 15HP / 雙段Two stage | 20HP / 雙段Two stage | 30HP / 雙段Two stage |
| 真空泵功率(乾式+助力泵) Vacuum pump (dry + booster pump) | 4HP+4HP | 6HP+4HP | 6HP+6HP |
| 真空抽氣速度(L/min) Pumping speed | 10000 | 15000 | 21000 |
| 加熱器(kw) Heater | 4.5KW | 5.4KW | 6.6KW |
| 真空泵冷卻冰水機 Vacuum pump cooling machine | 2RT | 3RT | 3RT |
| 總耗電量(kw) Electricity Consumption | 28kw | 35kw | 46kw |

本系列機型之冷凍系統均採水冷式散熱方式
This series of models of the refrigeration system are water-cooled cooling

● YK-118 Micro-Computer Vacuum Freeze Dryer

Be applicable to any kind of high value material and extract or ferment liquid drying. This equipment could keep very good of original color, organization, nutrient, survival of probiotic, etc. The operator control different type of the heating and sublimation procedure with micro-computer program setting. Also revise the program setting further to be more effective and precise from the computer history data. This would be one of the most modern scientific drying technology.

● Application:

Dry for bio-chemical, medicine, enzyme, etc.

● Any capacity is available.

(Any different capacity on customer's assign is acceptable.)

YK-118系列 (小量生產型)

真空冷凍乾燥機

Vacuum Freezed Dryer small yeild



● YK-118 真空冷凍乾燥機

某些乾燥產品，除了要求保持原有養份與成份外，當特別要求其外觀色澤與形狀的不變，及活性菌體之再生率或高價值之濃縮萃取液需要乾燥時，以真空冷凍乾燥機的升華乾燥方式乃是最具科學化與現代化的選擇。

● 用途：

農產品、水果、蔬菜、魚類、中藥材、化工、生化科技、製藥、酵素等之快速乾燥。

● 產品規格：Specifications

| 機型 TYPE | YK-118-50 | YK-118-30 | YK-118-20 |
|---------------------------------------|-------------------|-------------------------|-------------------------|
| 機臺尺寸 Dimension(cm) | 180x120x190 | 160x100x180 | 160x100x180 |
| 冷凝溫度 (°C) Condensation temperature | -50°C ~ -60°C | -40°C ~ -45°C | -40°C ~ -45°C |
| 置物盤數 The quantity of tray | 7 | 5 | 5 |
| 置物盤尺寸 tray size (cm) | 64x64x3 | 56x56x3 | 47.5X47.5X3 |
| 壓縮機能力 Compressor power | 5HP / 雙段Two stage | 5HP / 低溫Low temperature | 5HP / 低溫Low temperature |
| 真空抽氣速度(L/min)Pumping speed | 1200以上 above 1200 | 800以上 above 800 | 600以上 above 600 |
| 加熱器(kw) Heater | 3.6KW | 3KW | 2.4KW |
| 總耗電量(kw) Electricity Consumption | 12kw | 10kw | 8kw |

本系列機型之冷凍系統均採氣冷式散熱方式
The refrigeration system of this series of machine adopts air-cooled heat dissipation

● YK-118

Vacuum Freeze Dryer

When the material needs to be dried by keeping good original nutrition, structure and properties. Especially at the appearance color and shape to be kept as original as possible. High value extracting liquid to be dried. It's the most scientific and modern choice to adopt the vacuum freeze drying machine

● Applications:

Dry for agriculture, fruits, vegetables, fishes, herbs, chemical, bio-chemical, medicine and enzyme, etc.

YK-118-T系列 (實驗型)

實驗型真空冷凍乾燥機

Laboratory Type Freeze Dryer



● YK-118-T

實驗型真空冷凍乾燥機

某些乾燥產品，除了要求保持原有養份與成份外，當特別要求外觀色澤與形狀的不變，及活性菌體之再生率或高價值之濃縮萃取液需要乾燥時，以微電腦真空冷凍乾燥機的昇華乾燥方式，其微電腦程式控制及附設之電腦記錄追蹤乃是乾燥的產品，最具科學化與現代化的選擇，而本公司可依客戶需求設計不同產量的機型。

● 用途：

用於小量及各式產品乾燥實驗或試做之用途。

● 產品規格：Specifications

| 機型 TYPE | YK-118-T |
|---------------------------------------|----------------------------|
| 機臺尺寸 Dimension(cm) | 90X65X140 |
| 冷凝溫度 (°C) Condensation temperature | -40°C ~ -45°C |
| 置物盤數 The quantity of tray | 2 |
| 置物盤尺寸 tray size (cm) | 29x29x2.5 |
| 壓縮機能力 Compressor power | 全密式 Fully enclosed / 2HP以上 |
| 真空抽氣速度 (L/min) Pumping speed | 300以上 above 300 |
| 加熱器 (kw) Heater | 0.32kw |
| 總耗電量 (kw) Electricity Consumption | 3.3kw |

● YK-118-T

Laboratory Type Freeze Dryer

Be applicable to any kind of high value material and extract or ferment liquid drying. This equipment could keep very good of original color, organization, nutrient, survival of probiotic, etc. The operator control different type of the heating and sublimation procedure with micro-computer program setting. Also revise the program setting further to be more effective and precise from the computer history data. This would be one of the most modern scientific drying technology.

● APPLICATION:

Be applicable for every kind and small quantity of material trial drying.

YK-113系列

(除塵殺菌) 空調除濕機

Air Conditioning Dehumidifier

● 用途：

- 1、保持室內空間乾燥，避免生菌發霉；
- 2、適合生物科技、食品工業、制鞋工業、制藥工業、醫療工業、檢驗室、食品包裝室、制藥包裝室、倉庫、地下室及較潮濕辦公場所使用。

● 特點：

- 1、本機之除濕功率特高，除濕能力特強；
- 2、本機設有溫度控制，可調節室內溫度；
- 3、操作簡單，保養容易；
- 4、可加裝細塵過濾網，可有效過濾空氣中微細的粉塵與雜質；
- 5、可依客戶之需加裝紫外綫照射殺菌燈管，增加殺菌效果；
- 6、本機可依客戶空間大小及需求另行訂制大小規格機型。

● Application

- 1、To keep room from mildewing.
- 2、Suitabl for bio-tech, food industry, footwear industry, pharmacy industry, medical industry, laboratory, food packing room, pharmaceutical packing room, warehouse, basement, humidity working place, etc.

● Characteristic

- 1、Excellent performance in dehumidification.
- 2、Build- in temperature switch could adjust the temperature of indoor.
- 3、Easy operating and maintenance.
- 4、Dust filter is Optional to install, could filter particulatedust efficiently.
- 5、Optional install ultraviolet ray bactericidal lamp is available. Could strengthen the bactericidal effect.
- 6、Capacity&type could be designed to meet customer's requirements.



● 安裝方式：

本機需將散熱器安裝于室外，方可達到最好的效果，距離稍遠亦需選用水冷式的散熱方式。

● Installation instructin

For acquiring good effect, the radiator of the machine is designed installed outdoor, cooling tower is specially for long distance.

YK-100系列

低温噴霧乾燥機

Low Temperature Spray Dryer

● 原理與功效:

低温噴霧乾燥機的原理為將含固形物液體或濃縮萃取物，以非高温及特殊噴頭噴灑成霧狀分散在乾燥氣流中，水分迅速蒸發留下乾燥之固體粉末，且能在處理過程中保存生物活性物質或微生物的活性，以維持產品的功效，而工業之有毒廢水處理則可避免二次公害之產生。

● 用途與處理範圍:

- 1、菇類萃取液;
- 2、蔬菜類萃取液;
- 3、水果類萃取液;
- 4、中藥材類萃取液;
- 5、乳酸菌、益生菌;
- 6、化工業、電子業、陶瓷業、皮革業、染整業等之產品與廢水之處理。

● Principle:

The principle, to spray drying the liquid feedstock which contains solid partical or extract concentrate with none traditional high temperature air in drying chamber through nozzle atomizer, then become powder form. This processing mode is especially for heat sensitive products. It enables us to preserve nutrient contents of food longer, keep bio components active, even reduce pollution at industrial waste water minimize processes.

● Application scope:

- 1、Mushroom extract liquid;
- 2、Vegetable extract liquid;
- 3、Fruit extract liquid;
- 4、Chinese herbal medicine extract liquid;
- 5、Lactobacillus acidophilus, probiotics;
- 6、The manufacture of material powder&minimize treatment of wastewater of chemical industry, electron industry, ceramic industry, leather industry, etc.



臺灣專利 TAIWAN

PATANTED 208665 M246046

美國專利 U.S.A

PATANTED US6526774B1

德國專利 GERMANY

PATANTED 202004014488.3

大陸專利 CHINA

PATANTED ZL01233241.0 ZL200320103320.7

● 產品規格: Specifications

| | |
|--|------------------------|
| 裝置空間 Step Up Dimension | 16m ² × 4mh |
| 氣壓源 Required Air Supply | 4~6kg/cm ² |
| 電壓 Voltage | 3Ø~220v/380v |
| 操作溫度 Operating Temperature | 40~60°C |
| 操作濕度 Operating Humidity | 8%~15% |
| 噴霧量 Processing Capacity | 1~3l/hr |
| 粉末含水量 Moisture content of Powder | 5~10% |
| 噴霧量及乾燥后含水量視不同產品及設定條件而定; Processing capacity & meisture content of powder depend upon the material and the operating conditions. | |
| 產量可依客戶需求設計。 Capacity could be designed to meet customer's requirements. | |


組合式冷凍冷藏庫整廠設備

Proposal For Combination Cooler And Freezer Storage Equipment

分解組合圖

Drawing Of Construction

- 壓力調節器
Heated Ventilator
- 庫內燈開關
Lamp Switch
- 角板
Corner plate
- 壁板
Wall plate

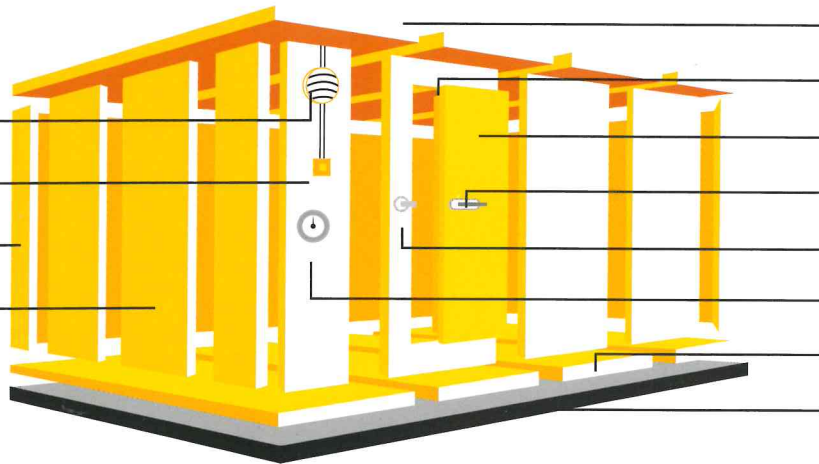


- 頂板
Roof plate
- 電熱絲
Heater
- 門
Door
- 安全把手
Release Handle
- 快鎖鉤
Rotary Hook
- 溫度計
Thermometer
- 底座
Base Panel
- 木底座
Base Wood base

● 保鮮專用

- 1、活動式組合，從1坪至百坪，可依地形隨意組合，安裝快速，省時省力。
- 2、裝卸輕便，安裝後可再改變坪數彈性大，擴充容易搬運方便。
- 3、採用PU超薄壁發泡一體成型之庫板結構，保溫效果最佳，氣密性特優。
- 4、結構堅固、防震、防火、貯藏物可安全保存。
- 5、採用分離式強力冷凍系統，省電安靜，經久耐用，完全自動控制并可附加(加濕設備)，適合花卉、蔬果之貯存。
- 6、適合西點麵包、藥品、奶品、電子零件、超級市場、餐廳、冷凍食品、蔬菜、水果、鮮花、海產、肉類……各行業之使用。

● Professionally Used To Keep Freshness

- 1、Detachable built-up pings; available within the range from one to one hundred pings; possible to be assembled in accordance with the topography; quick installation; saving time & labor.
- 2、Easy assembly and detachment; flexible for the allowance to change the size by changing the ping number even when it is built-up easy to expand and convenient when transporting.
- 3、PU one-piece foam super light board is used as construction; best thermo-regulation effect and no leakage.
- 4、Firm construction; fire-proof and well-stored goods.
- 5、Separating universal refrigerating system is adopted to give such advantages as quiet, power-saving, lasting, total-automatic control with moistening device; suitable for storage of flowers, vegetables and fruits.
- 6、Application: Bakery stuff, drugs, milks, electric parts, refrigerating food, vegetables, fruits, fresh flowers, seafood, meat and the like appearing in supermarkets, restaurants and other such places.

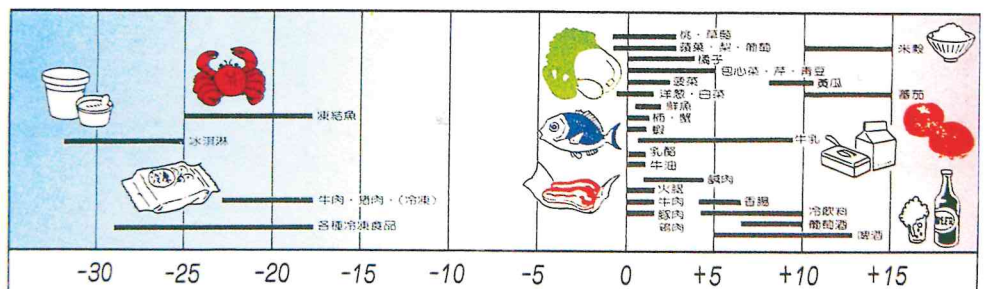

● 適用溫度 Apply Temperature

| Plate Thickness 庫板厚度 | Temperature 溫度 |
|-------------------------|-------------------|
| 60m/m | +5°C ~ +10°C |
| 110m/m | 0°C ~ -30°C |
| 150m/m | -30°C 以下down |

● 庫體高度 Object Highness

| Thickness 厚度 | Highness 高度 | 庫內高度 Inside Highness |
|-------------------|------------------|-------------------------|
| 60m/m (2 3/8") | 2115m/m (7ft) | 2420m/m (8ft) |
| | 2725m/m (9ft) | 2725m/m (9ft) |
| 110m/m (4") | 2115m/m (7ft) | 2420m/m (8ft) |
| | | 2725m/m (9ft) |






ISO9001



YK-CWI工業用冰水機組系列 Industrial Cooling Water System

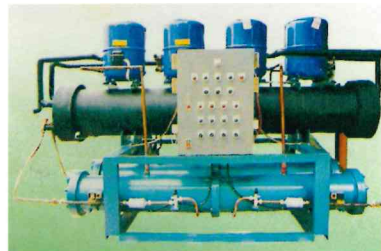

● 品質優良是您信心的保證

- 1、大出水量,超低温冰水1℃~10℃適於各行業之使用;
- 2、具有油加温器裝置,能使冷凍油與冷媒分離,保持潤滑效果,可隨時啓動壓縮機;
- 3、高效率壓縮機,設有溫度保護開關,超載繼電器。高低壓安全開關,過濾乾燥器等裝置,壽命特長;
- 4、壓縮機附有防震橡皮座,減少震動,運轉時聲音低;
- 5、具感温膨脹閥,能自動調節冷媒流量,使主機發揮最高效率及最經濟之運轉;
- 6、具有防凍及冰水溫度控制省電裝置,當冷水達到設定溫度時,壓縮機能自動停止運轉,冷卻效果不變,省電并防止冷水凍結;
- 7、適用於射出成型業、制鞋業、制藥業、食品業、空調業、化工業、電子業……等。

● High quality is best guarantee for you

- 1、It can make a large volume of cooling water to various industries.
- 2、The oil-heating device enable to separate refrigerant oil and freon in order to keep lubricating and easily start compressor anytime.
- 3、There are temperature control system, over-relay switch, safety switch fo high and low pressure and filter dryer on compressor in orde to extend useful life.
- 4、Rubber pad on compressor enables to prevent shake and noises in operating.
- 5、Thermo valve expansion can automatically adjust floating volume of freon.
- 6、There are anti-freezing and saving power function from controlling cooling-water temperature. When the cooling water temperature reach to certain temperature,compressor will automatically stop but the cooling efficiency as well as usual.
- 7、Suitable for injection, medience , food , air-condition, chemical & electronic industrial, etc.



臺灣總公司: 412台灣台中市大里區東興路511號
Address: No.511 Dongxing Rd. Dali Dist. Taichung City 412 Taiwan
電話: 886-4-24063368(代表號)
傳真: 886-4-24069077
E-mail: sales@trueten.com.tw / tt@trueten.com.tw

中國工廠: 廣州主典冷凍制鞋機械製造有限公司
FAC:Guangzhou TrueTen Freezing-types Shoe-making Machinery Co., Ltd.
地 址: 廣東省東莞市大嶺山鎮教育路381號
ADD : No.381,Jiaoyu Rd, Da Lingshan Town, Dong Guan city, Guang Dong Province, China
TEL : (86)769-83358109 85613498 85628716 FAX: (86)769-83350176

大陸展售中心: 廣東省東莞市厚街鎮厚道路西5號
China salesdepartment: No.5 West Hou Dao Rd, Hou Jie Town, Dong Guan City, Guang Dong Province, China
TEL : (86)769-85933766 85933866 FAX: (86)769-85933966
E-mail: sales@trueten.com.tw / tt@trueten.com.tw
http://www.trueten.com.tw

國家設計優良產品獎
Good Design Product

YK-111
美國專利號碼 5940983
臺灣專利號碼 130580, 130582, 062994
大陸專利號碼 ZL98209051.X

YK-112
臺灣專利號碼 184212
大陸專利號碼 Z198250025.4

YK-116
臺灣專利號碼 197692
大陸專利號碼 EL02289168.4